


# S702

The S702's optimized tread formula improves wear resistance by ensuring the tyre runs cool. A rib between the pattern blocks help reduce partial wear and improve scrub resistance.

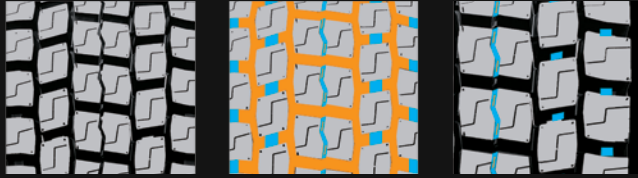

### Features & Benefits:

- Widened tread grooves improve self-cleaning capabilities for grip.
- The rib between pattern blocks is designed to improve stiffness and reduce partial wear.
- Widened running surface allows for better driving stability.

Size	L.I.	S.R.	P.R.	T.D.	RIM	O.D.	S.W.	Std. RIM	L.C.C.		RR	WG	NG DB	NG
									Single	Dual				
									kg	kg				
205/75R17.5	124/122	L	14PR	15.5	17.5	753	205	6	1600@750	1500@750	D	C	75	2
215/75R17.5	126/124	M	14PR	15.5	17.5	773	211	6	1700@700	1600@700	D	C	75	2
235/75R17.5	132/130	M	14PR	15.5	17.5	803	233	6.75	2000@760	1900@760	D	C	75	2
235/75R17.5	143/141	K	16PR	15.5	17.5	803	233	*	*	*	D	C	75	2
245/70R17.5	143/141(146/146)	J(F)	18PR	*	17.5	*	*	*	*	*	*	*	*	*
225/70R19.5	128/126	L	14PR	15.5	19.5	817	226	6.75	1800@760	1700@760	D	C	75	2
245/70R19.5	136/134	M	16PR	16	19.5	845	248	7.5	2060@760	1950@760	D	C	75	2
265/70R19.5	140/138	M	16PR	16	19.5	873	262	7.5	2500@775	2360@775	D	C	75	2
265/70R19.5	143/141	J	18PR	16	19.5	873	262	7.5	2725@900	2575@900	D	C	75	2
285/70R19.5	145/143	M	16PR	16.5	19.5	895	283	8.25	2900@850	2725@850	D	B	73	2
295/80R22.5	152/148	M	16PR	22.5	22.5	1044	298	9	3550@850	3150@850	D	B	75	2
315/70R22.5	152/148	M	16PR	*	22.5	*	*	*	*	*	D	B	75	2
315/70R22.5	154/150(152/148)	L(M)	18PR	*	*	*	*	*	*	*	D	B	75	2
315/80R22.5	154/150	M	16PR	20.5	22.5	1082	312	9	3750@825	3350@825	D	B	75	2
315/80R22.5	156/150(154/150)	L(M)	18PR	20.5	22.5	1082	312	9	4000@850	3350@850	D	B	75	2

\* Data available on request