


The S811 has reduced noise emissions with its varied pitch design and the closed shoulder offers good stability and improves uniform shoulder wear.

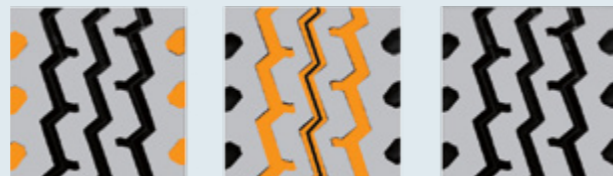


**Features & Benefits:**

- The large and deep shoulder grooves increase traction.
- The unique main groove design provides greater grip and traction, as well as improves stability and reduces irregular wear.
- The wider running surface and high strength tread formula improve puncture and scrub resistance.

Size	L.I. / S.R.	P.R.	T.D.	RIM	O.D.	S.W.	S.L.R.	L.C.C.		
								mm	inch	mm
CN/VN 7.00R16LT	118/114K	14	11.5	5.50F	775	200	14.3	1320	1180	770
CN/VN 7.50R16LT	122/118K	14	12.5	6.00G	805	215	14.8	1500	1320	770
CN/VN 8.25R16LT	128/124K	16	13.5	6.50H	855	235	15.6	1800	1600	770
CN/VN 7.50R20	135/133K	16	13.5	6.0	935	215	17.1	2180	2060	900
CN/VN 8.25R20	139/137K	16	13.0	6.5	974	236	17.8	2430	2300	930
CN/VN 9.00R20	144/142K	16	15.0	7.0	1019	259	18.6	2800	2650	900
CN/VN 10.00R20	149/146K	18	16.0	7.5	1054	278	19.1	3250	3000	930
	146/143K	16	16.0	7.5	1054	278	19.1	3000	2725	830
CN/VN 11.00R20	150/147K	16	16.5	8.0	1085	293	19.7	3350	3075	830
	152/149K	18	16.5	8.0	1085	293	19.7	3550	3250	930
CN/VN 12.00R20	154/151K	18	17.0	8.5	1125	315	20.3	3750	3450	830
CN 12.00R20	154/149K	18	17.0	8.5	1125	315	20.3	3790	3270	840
VN 315/80R22.5	156/153K	20	16.0	9.00	1076	312	19.8	4000	3650	850
VN 11R22.5	148/145M	16	16.0	8.25	1054	279	19.3	3150	2900	850
VN 11R22.5	144/142M	14	16.0	8.25	1054	279	19.3	2800	2650	720
CN/VN 11R24.5	149/146M	16	16.0	8.25	1104	279	20.3	3250	3000	830
CN/VN 11R24.5	146/143L	14	16.0	8.25	1104	279	20.3	3000	2725	720



The S812 has reduced noise emissions with its varied pitch design and the closed shoulder offers good stability and improves uniform shoulder wear.

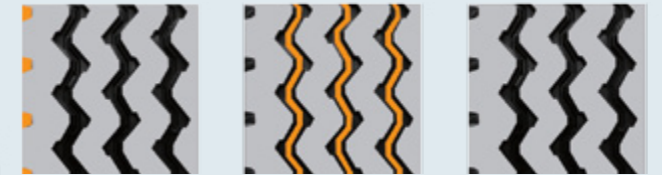

**Features & Benefits:**

- The unique groove angles and interior design improve grip and traction.
- The widened running surface and high strength tread formula offer excellent puncture and scrub resistance.

Size	L.I. / S.R.	P.R.	T.D.	RIM	O.D.	S.W.	S.L.R.	L.C.C.		
								mm	inch	mm
CN 7.00R16LT	118/114K	14	11.5	5.50F	775	200	14.3	1320	1180	770
CN 7.50R16LT	122/118K	14	12.5	6.00G	805	215	14.8	1500	1320	770
CN 8.25R16LT	128/124K	16	13.5	6.50H	855	235	15.6	1800	1600	770