




BAM25

Suitable Conditions

Medium and long mileage trucks running on paved and unpaved roads.

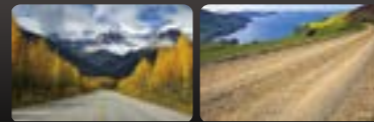

Suitable

- High wear resistance.
- Low noise emissions.
- Long tread life.
- Improved heat dissipation.

| Plant | Size | L.I. / S.R. | P.R. | T.D. mm | RIM inch | O.D. mm | S.W. mm | S.L.R. inch | L.C.C. | | | |
|-------|----------|-------------|------|---------|----------|---------|---------|-------------|-----------|---------|----------|----------|
| | | | | | | | | | Single kg | Dual kg | A.P. kPA | A.P. PSI |
| VN | 10.00R20 | 149/146K | 18 | 15.0 | 7.50 | 1054 | 278 | 19.13 | 3250 | 3000 | 930 | 135 |
| CN | 11.00R20 | 152/149K | 18 | 16.5 | 8.00 | 1059 | 293 | 19.65 | 3550 | 3250 | 930 | 135 |
| CN/VN | 12.00R24 | 162/160K | 22 | 14.5 | 8.50 | 1238 | 315 | 22.52 | 4750 | 4500 | 850 | 125 |
| VN | 12R22.5 | 152/149L | 18 | 15.5 | 9.00 | 1085 | 300 | 19.84 | 3550 | 3250 | 930 | 135 |



BAM26

Suitable Conditions

Medium and short mileage trucks running on paved and unpaved roads.



Suitable

- Improved heat dissipation.
- Excellent durability.

| Plant | Size | L.I. / S.R. | P.R. | T.D. mm | RIM inch | O.D. mm | S.W. mm | S.L.R. inch | L.C.C. | | | |
|-------|-------------|-------------|------|---------|----------|---------|---------|-------------|-----------|---------|----------|----------|
| | | | | | | | | | Single kg | Dual kg | A.P. kPA | A.P. PSI |
| CN | 9.5R17.5 | 143/141K | 18 | 16.0 | 6.75 | 842 | 240 | 15.63 | 2725 | 2575 | 875 | 125 |
| CN | 10R17.5 | 143/141K | 18 | 16.0 | 7.50 | 858 | 254 | 16.22 | 2725 | 2575 | 850 | 125 |
| CN | 265/70R19.5 | 143/141J | 18 | 15.0 | 7.50 | 867 | 262 | 15.83 | 2725 | 2575 | 900 | 130 |