




BAM99

Suitable Conditions

Medium and long mileage trucks running on paved and unpaved roads.



Suitable


- Four belt structure improve shock and puncture resistance.
- Aggressive tread design provides excellent on and off-road traction.
- Main grooves enhance wet traction.
- Central groove nodules reduce stone retention.



BAR02

Suitable Conditions

Medium and long mileage trucks running on paved and unpaved roads.

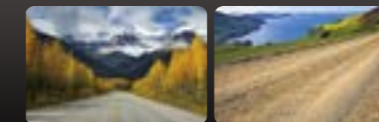

Suitable

- Wide tread and solid shoulder ribs deliver exceptional stability and promote even wear.
- Deep tread improves service life and traction.

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
CN/VN	385/65R22.5	158K	18	16.5	11.75	1072	389	19.45	4250	830	120	
CN/VN	385/65R22.5	160K	20	16.5	11.75	1072	389	19.45	4500	900	130	
CN	425/65R22.5	165K	20	17.5	12.25	1124	422	20.28	5150	830	120	

Plant	Size	L.I. / S.R.	P.R.	T.D. mm	RIM inch	O.D. mm	S.W. mm	S.L.R. inch	L.C.C.			
									Single kg	Dual kg	A.P. kPA	A.P. PSI
CN/VN	11R22.5	146/143K	16	18.0	8.25	1065	279	19.33	3000	2725	830	120
CN/VN	11R24.5	149/146K	16	18.0	8.25	1116	279	20.31	3250	3000	830	120
CN/VN	255/70R22.5	140/137L	16	17.5	7.50	930	255	17.13	2500	2300	830	120
CN	255/70R22.5	143/141K	18	17.5	7.50	930	255	17.13	2725	2575	900	130
CN/VN	275/70R22.5	148/145K	16	16.0	8.25	958	276	17.56	3150	2900	900	130
CN/VN	275/70R22.5	148/145K	18	16.0	8.25	958	276	17.56	3150	2900	900	130
CN/VN	315/80R22.5	161/157G	20	17.0	9.00	1076	312	19.69	4625	4125	900	130
CN	315/80R22.5	156/153K	20	17.0	9.00	1076	312	19.69	4000	3650	850	125